

# Accuphase

CLEAN POWER SUPPLY

## PS-1250

- Input/output waveform display
- Output power meter
- Input/output voltage meter
- Input/output distortion meter
- Massive output capacity
- 0.08% total harmonic distortion waveform shaping
- High-grade output voltage correction
- Numerous output terminals
- High-sensitivity protection circuitry
- Large high-efficiency toroidal transformer
- Large filtering capacitors



## Advanced Features

### Robust power supply stage

The PS-1250 features a strong power supply consisting of a large shielded toroidal power transformer and two large filtering capacitors (48,000  $\mu$ F/100 V).



Shielded toroidal power transformer



Filtering capacitors


### Elegant appearance

The aluminum side panels are finished to a high gloss and perfectly complement the champagne-colored front panel to create an exquisite look that will blend in seamlessly with any audio system.



### Multiple output terminals

The PS-1250 is equipped with multiple output terminals to accommodate numerous audio equipment components.

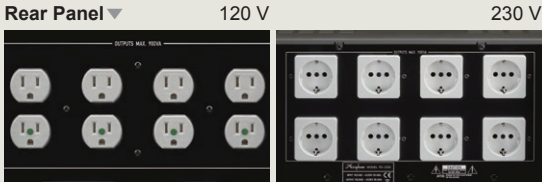

### Compatible equipment

Though power consumption for electrical equipment is shown in watts (W), the VA (volt-ampere) of the system components is used to determine which units can be connected with the PS-1250. The VA/W ratio is different for each piece of electrical equipment, but the VA value is generally 1.2–1.8 times the W value.


How to check

- Switch the display mode to the VOLT-AMPERE display and connect the equipment, making sure the total is less than 900 VA.
- The LED on the display selector will blink if the total exceeds 1,200 VA. Disconnect any equipment until the light turns steady.
- Since the VA level of integrated amplifiers and power amplifiers depends on the volume level, keep VA below 900 VA at maximum volume levels.

### Front Panel



### Rear Panel (The photograph shows the 230 V version.)

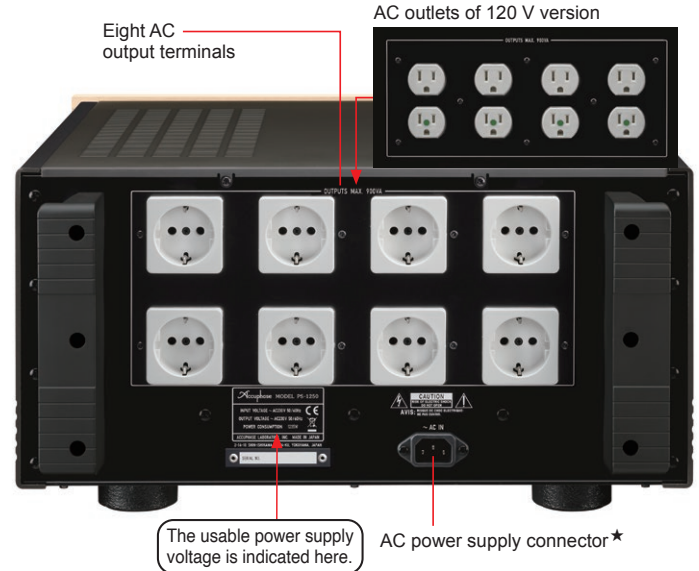

### PS-1250 Guaranteed Specifications

Rated Output Capacity	900 VA (continuous)	
Rated Output Voltage	AC 120 V $\pm$ 1.5 V	AC 230 V $\pm$ 3.0 V
Rated Output Current	7.5 A	3.9 A
Output Frequency	50 Hz or 60 Hz (identical to input frequency)	
Output Waveform THD	0.08% or less	
Rated Input Voltage	AC 120 V $\pm$ 10%	AC 230 V $\pm$ 10%
Input Frequency	50 Hz or 60 Hz	
No-load Power Consumption	37 W	55 W
Cooling Principle	Natural air cooling	

Display	VOLT-AMPERE	0–1,200 VA	
	VOLTAGE INPUT / OUTPUT (green zone range)	AC 120 V $\pm$ 10%	AC 230 V $\pm$ 10%
	DISTORTION INPUT / OUTPUT	0–6%	
	WAVE FORM INPUT / OUTPUT	—	
Maximum Dimensions		Width 465 mm (18.3") $\times$ Height 243 mm (9.6") $\times$ Depth 499 mm (19.6")	
Mass	Net	42.1 kg (92.8 lbs.)	41.3 kg (91.1 lbs.)
	In shipping carton	51 kg (113 lbs.)	51 kg (113 lbs.)

#### Note

\* The 230 V AC and 120 V AC versions of the PS-1250 differ regarding meter voltage indication, AC output connector shape, supplied power cord, etc. Make sure that you have the correct version.



Caution

- \* The PS-1250 is available in 230 V AC and 120 V AC versions. The actual allowable voltage is indicated next to the AC power connectors on the rear panel. Be sure to check this indication before using the PS-1250.
- \* This product can be used only on a regular household AC circuit rated for 230 V or 120 V AC, 50/60 Hz. Using the product with portable AC generators, airplane or ship power generators or other types of power sources is not possible.
- \* This product is designed to improve the quality of AC power supplied to audio or video components. Do not use it to power industrial type equipment or common household electrical appliances.
- \* Do not use this unit for powering equipment where failure incurs a risk of injury or fatal accidents (medical equipment, aviation equipment, traffic control equipment, furnace and heating control equipment, safety devices, etc.). Accuphase will not be liable for any problem occurring due to use of the PS-1250 with the above type of equipment.

- Supplied accessory
- AC power cord



ACCUPHASE LABORATORY, INC.